

**CULTEC RECHARGER® 902HD SPECIFICATIONS**

**GENERAL**  
CULTEC RECHARGER® 902HD CHAMBERS ARE DESIGNED FOR UNDERGROUND STORMWATER MANAGEMENT. THE CHAMBERS MAY BE USED FOR RETENTION, RECHARGING, DETENTION OR CONTROLLING THE FLOW OF ON-SITE STORMWATER RUNOFF.

**CHAMBER PARAMETERS**

- THE CHAMBERS SHALL BE MANUFACTURED IN THE U.S.A. OR CANADA BY CULTEC OF BROOKFIELD, CT (CULTEC.COM, 203-775-4416).
- THE CHAMBERS SHALL BE DESIGNED AND TESTED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". THE LOAD CONFIGURATION SHALL INCLUDE:
  - A. INSTANTANEOUS AASHTO DESIGN TRUCK LIVE LOAD AT MINIMUM COVER
  - B. MAXIMUM PERMANENT (50-YEAR) COVER LOAD
  - C. 1-WEEK PARKED AASHTO DESIGN TRUCK LOAD
- THE CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F3430-20 "STANDARD SPECIFICATION FOR CELLULAR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
- THE INSTALLED CHAMBER SYSTEM SHALL PROVIDE RESISTANCE TO THE LOADS AND LOAD FACTORS AS DEFINED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS SECTION 12.12, WHEN INSTALLED ACCORDING TO CULTEC'S RECOMMENDED INSTALLATION INSTRUCTIONS. THE STRUCTURAL DESIGN OF THE CHAMBERS SHALL INCLUDE THE FOLLOWING:
  - A. THE CREEP MODULUS SHALL BE 50-YEAR AS SPECIFIED IN ASTM F3430
  - B. THE MINIMUM SAFETY FACTOR FOR LIVE LOADS SHALL BE 1.75
  - C. THE MINIMUM SAFETY FACTOR FOR DEAD LOADS SHALL BE 1.95
- THE CHAMBER SHALL BE STRUCTURAL FOAM INJECTION MOLDED OF BLUE VIRGIN HIGH MOLECULAR WEIGHT IMPACT-MODIFIED POLYPROPYLENE.
- THE CHAMBER SHALL BE ARCHED IN SHAPE.
- THE CHAMBER SHALL BE OPEN-BOTTOMED.
- THE CHAMBER SHALL BE JOINED USING AN INTERLOCKING OVERLAPPING RIB METHOD. CONNECTIONS MUST BE FULLY SHOULDERED OVERLAPPING RIBS, HAVING NO SEPARATE COUPLINGS.
- THE NOMINAL CHAMBER DIMENSIONS OF THE CULTEC RECHARGER® 902HD SHALL BE 48 INCHES (1219 MM) TALL, 78 INCHES (1981 MM) WIDE AND 4.25 FEET (1.30 M) LONG. THE INSTALLED LENGTH OF A JOINED RECHARGER 902HD SHALL BE 3.67 FEET (1.12 M).
- MULTIPLE CHAMBERS MAY BE CONNECTED TO FORM DIFFERENT LENGTH ROWS. EACH ROW SHALL BEGIN AND END WITH A SEPARATELY FORMED CULTEC RECHARGER® 902HD END CAP. MAXIMUM INLET OPENING ON THE END CAP IS 30 INCHES (750 MM) HDPE OR 36 INCHES (900 MM) PVC.
- THE CHAMBER SHALL HAVE TWO SIDE PORTALS TO ACCEPT CULTEC HVLV™ FC-48 FEED CONNECTORS TO CREATE AN INTERNAL MANIFOLD. MAXIMUM ALLOWABLE PIPE SIZE IN THE SIDE PORTAL IS 10 INCHES (250 MM) HDPE AND 12 INCHES (300 MM) PVC.
- THE NOMINAL CHAMBER DIMENSIONS OF THE CULTEC HVLV™ FC-48 FEED CONNECTOR SHALL BE 12 INCHES (305 MM) TALL, 16 INCHES (406 MM) WIDE AND 49 INCHES (1245 MM) LONG.
- THE NOMINAL STORAGE VOLUME OF THE RECHARGER 902HD CHAMBER SHALL BE 17.31 FT<sup>3</sup> / FT (1.61 M<sup>3</sup> / M) - WITHOUT STONE. THE NOMINAL STORAGE VOLUME OF A JOINED RECHARGER 902HD SHALL BE 63.47 FT<sup>3</sup> / UNIT (1.80 M<sup>3</sup> / UNIT) - WITHOUT STONE.
- THE NOMINAL STORAGE VOLUME OF THE HVLV™ FC-48 FEED CONNECTOR SHALL BE 0.913 FT<sup>3</sup> / FT (0.085 M<sup>3</sup> / M) - WITHOUT STONE.
- THE RECHARGER 902HD CHAMBER SHALL HAVE 5 CORRUGATIONS.
- THE CHAMBER SHALL BE CAPABLE OF ACCEPTING A 6 INCH (150 MM) INSPECTION PORT OPENING AT THE TOP CENTER OF EACH CHAMBER, CENTERED ON THE CORRUGATION CREST.
- THE CHAMBER SHALL BE MANUFACTURED IN A FACILITY EMPLOYING CULTEC'S QUALITY CONTROL AND ASSURANCE PROCEDURES.
- MAXIMUM ALLOWABLE COVER OVER THE TOP OF THE CHAMBER SHALL BE 8.3 FEET (2.53 M).

**END CAP PARAMETERS**

- THE CULTEC RECHARGER® 902HD END CAP (REFERRED TO AS "END CAP") SHALL BE MANUFACTURED IN THE U.S.A. BY CULTEC OF BROOKFIELD, CT (CULTEC.COM, 203-775-4416).
- THE END CAP SHALL BE STRUCTURAL FOAM INJECTION MOLDED OF BLUE VIRGIN HIGH MOLECULAR WEIGHT IMPACT-MODIFIED POLYPROPYLENE.
- THE END CAP SHALL BE ARCHED IN SHAPE.
- THE END CAP SHALL BE JOINED AT THE BEGINNING AND END OF EACH ROW OF CHAMBERS USING AN INTERLOCKING OVERLAPPING RIB METHOD. CONNECTIONS MUST BE FULLY SHOULDERED OVERLAPPING RIBS, HAVING NO SEPARATE COUPLINGS.
- THE END CAP SHALL HAVE 5 CORRUGATIONS.
- THE NOMINAL DIMENSIONS OF THE END CAP SHALL BE 48.5 INCHES (1231 MM) TALL, 78 INCHES (1982 MM) WIDE AND 28.0 INCHES (711 MM) LONG. WHEN JOINED WITH A RECHARGER 902HD CHAMBER, THE INSTALLED LENGTH OF THE END CAP SHALL BE 24.0 INCHES (610 MM).
- THE NOMINAL STORAGE VOLUME OF THE END CAP SHALL BE 9.01 FT<sup>3</sup> / FT (0.83 M<sup>3</sup> / M) - WITHOUT STONE. THE NOMINAL STORAGE VOLUME OF AN INTERLOCKED END CAP SHALL BE 18.02 FT<sup>3</sup> / UNIT (0.51 M<sup>3</sup> / UNIT) - WITHOUT STONE.
- MAXIMUM INLET OPENING ON THE END CAP IS 30 INCHES (750 MM) HDPE OR 36 INCHES (900 MM) PVC.
- THE END CAP SHALL PROVIDE RESISTANCE TO THE LOADS AND LOAD FACTORS AS DEFINED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS SECTION 12.12.

**CULTEC HVLV FC-48 FEED CONNECTOR PRODUCT SPECIFICATIONS**

**GENERAL**  
CULTEC HVLV FC-48 FEED CONNECTORS ARE DESIGNED TO CREATE AN INTERNAL MANIFOLD FOR CULTEC RECHARGER MODEL 902HD STORMWATER CHAMBERS.

**FEED CONNECTOR PARAMETERS**

- THE FEED CONNECTOR SHALL BE MANUFACTURED BY CULTEC OF BROOKFIELD, CT. (203-775-4416 OR 1-800-428-5832)
- THE FEED CONNECTOR SHALL BE VACUUM THERMOFORMED OF BLACK HIGH MOLECULAR WEIGHT HIGH DENSITY POLYETHYLENE (HMWHDPE).
- THE FEED CONNECTOR SHALL BE ARCHED IN SHAPE.
- THE FEED CONNECTOR SHALL BE OPEN-BOTTOMED.
- THE NOMINAL DIMENSIONS OF THE CULTEC HVLV FC-48 FEED CONNECTOR SHALL BE 12 INCHES (305 mm) TALL, 16 INCHES (406 mm) WIDE AND 49 INCHES (1245 mm) LONG.
- THE NOMINAL STORAGE VOLUME OF THE HVLV FC-48 FEED CONNECTOR SHALL BE 0.913 FT<sup>3</sup> / FT (0.085 m<sup>3</sup> / m) - WITHOUT STONE.
- THE HVLV FC-48 FEED CONNECTOR SHALL HAVE 4 CORRUGATIONS.
- THE HVLV FC-48 FEED CONNECTOR MUST BE FORMED AS A WHOLE UNIT HAVING TWO OPEN END WALLS AND HAVING NO SEPARATE END PLATES OR SEPARATE END WALLS. THE UNIT SHALL FIT INTO THE SIDE PORTALS OF THE CULTEC RECHARGER STORMWATER CHAMBER AND ACT AS CROSS FEED CONNECTIONS CREATING AN INTERNAL MANIFOLD.
- THE FEED CONNECTOR SHALL BE DESIGNED TO WITHSTAND AASHTO HS-25 DEFINED LOADS WHEN INSTALLED ACCORDING TO CULTEC'S RECOMMENDED INSTALLATION INSTRUCTIONS.
- THE FEED CONNECTOR SHALL BE MANUFACTURED IN AN ISO 9001:2008 CERTIFIED FACILITY.

**CULTEC NO. 410™ NON-WOVEN GEOTEXTILE**

CULTEC NO. 410™ NON-WOVEN GEOTEXTILE MAY BE USED WITH CULTEC CONTACTOR® AND RECHARGER® STORMWATER INSTALLATIONS TO PROVIDE A BARRIER THAT PREVENTS SOIL INTRUSION INTO THE STONE.

**GEOTEXTILE PARAMETERS**

- THE GEOTEXTILE SHALL BE PROVIDED BY CULTEC OF BROOKFIELD, CT. (203-775-4416 OR 1-800-428-5832)
- THE GEOTEXTILE SHALL BE BLACK IN APPEARANCE.
- THE GEOTEXTILE SHALL HAVE A TYPICAL WEIGHT OF 4.5 OZ/SY (142 G/M).
- THE GEOTEXTILE SHALL HAVE A TENSILE STRENGTH VALUE OF 120 LBS (533 N) PER ASTM D4632 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE AN ELONGATION @ BREAK VALUE OF 50% PER ASTM D4632 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A MULLEN BURST VALUE OF 225 PSI (1551 KPA) PER ASTM D3786 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A PUNCTURE STRENGTH VALUE OF 65 LBS (289 N) PER ASTM D4833 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A CBR PUNCTURE VALUE OF 340 LBS (1513 N) PER ASTM D6241 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A TRAPEZOID TEAR VALUE OF 50 LBS (222 N) PER ASTM D4533 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A AOS VALUE OF 70 U.S. SIEVE (0.212 MM) PER ASTM D4751 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A PERMITTIVITY VALUE OF 1.7 SEC-1 PER ASTM D4491 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A WATER FLOW RATE VALUE OF 135 GAL/MIN/SF (5500 L/MIN/SQ M) PER ASTM D4491 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A UV STABILITY @ 500 HOURS VALUE OF 70% PER ASTM D4355 TESTING METHOD.

**CULTEC AFAB-HPF™ WOVEN GEOTEXTILE**

CULTEC AFAB-HPF™ WOVEN GEOTEXTILE IS DESIGNED AS AN UNDERLAYMENT TO PREVENT SCOURING CAUSED BY WATER MOVEMENT WITHIN THE CULTEC CHAMBERS AND FEED CONNECTORS UTILIZING THE CULTEC MANIFOLD FEATURE. IT MAY ALSO BE USED AS A COMPONENT OF THE CULTEC SEPARATOR ROW TO ACT AS A BARRIER TO PREVENT SOIL/CONTAMINANT INTRUSION INTO THE STONE WHILE ALLOWING FOR MAINTENANCE.


**GEOTEXTILE PARAMETERS**

- THE GEOTEXTILE SHALL BE PROVIDED BY CULTEC OF BROOKFIELD, CT. (203-775-4416 OR 1-800-428-5832)
- THE GEOTEXTILE SHALL BE BLACK IN APPEARANCE.
- THE GEOTEXTILE SHALL HAVE A TENSILE STRENGTH OF 320 X 320 LBS (1,420 X 1,420 N) PER ASTM D4632 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE AN ELONGATION @ BREAK RESISTANCE OF 15 X 15% PER ASTM D4632 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A WIDE WIDTH TENSILE RESISTANCE OF 3,563 X 3,563 LBS/FT (52 X 52 KN/M) PER ASTM D4595 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A CBR PUNCTURE RESISTANCE OF 1,500 LBS (6,670 N) PER ASTM D6241 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A TRAPEZOIDAL TEAR RESISTANCE OF 120 X 120 LBS (540 X 540 N) PER ASTM D4533 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE AN APPARENT OPENING SIZE OF 30 US STD. SIEVE (0.60 MM) PER ASTM D4751 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A PERMITTIVITY RATING OF 0.2 SEC-1 PER ASTM D4491 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A WATER FLOW RATING OF 22 GPM/FT<sup>2</sup> (900 LPM/M<sup>2</sup>) PER ASTM D4491 TESTING METHOD.
- THE GEOTEXTILE SHALL HAVE A UV RESISTANCE OF 70% @ 500 HRS. PER ASTM D4355 TESTING METHOD.


**GENERAL NOTES**

PIPE	A	B
6" [150 mm]	38.00" [965 mm]	1.00" [25 mm]
8" [200 mm]	36.00" [914 mm]	1.00" [25 mm]
10" [250 mm]	33.80" [858 mm]	1.25" [32 mm]
12" [300 mm]	29.25" [743 mm]	1.75" [44 mm]
15" [375 mm]	25.75" [654 mm]	2.00" [50 mm]
18" [450 mm]	21.75" [552 mm]	2.50" [64 mm]
21" [525 mm]	18.75" [476 mm]	2.50" [64 mm]
24" [600 mm]	15.75" [400 mm]	2.50" [64 mm]
30" [750 mm]	7.75" [197 mm]	3.50" [89 mm]
36" [900 mm]	N/A	3.50" [89 mm]

\*THE TYPICAL INVERT TABLE ABOVE IS BASED ON THE INSIDE DIAMETER OF STANDARD CORRUGATED PLASTIC PIPE. THE HEAVY DUTY END CAP HAS PRE-MARKED TRIM LINES FOR PIPE DIAMETERS 12" (300mm), 15" (375mm), 18" (450mm), (600mm), 30" (750mm), AND 36" (900mm). PIPES OF ANY SIZE AND MATERIAL MAY BE PLACED AT CUSTOM LOCATIONS AND CUSTOM INVERTS. THE CROWN OF THE PIPE MUST REMAIN A MINIMUM OF 4" (100mm) FROM THE EDGE OF THE HEAVY DUTY END CAP.

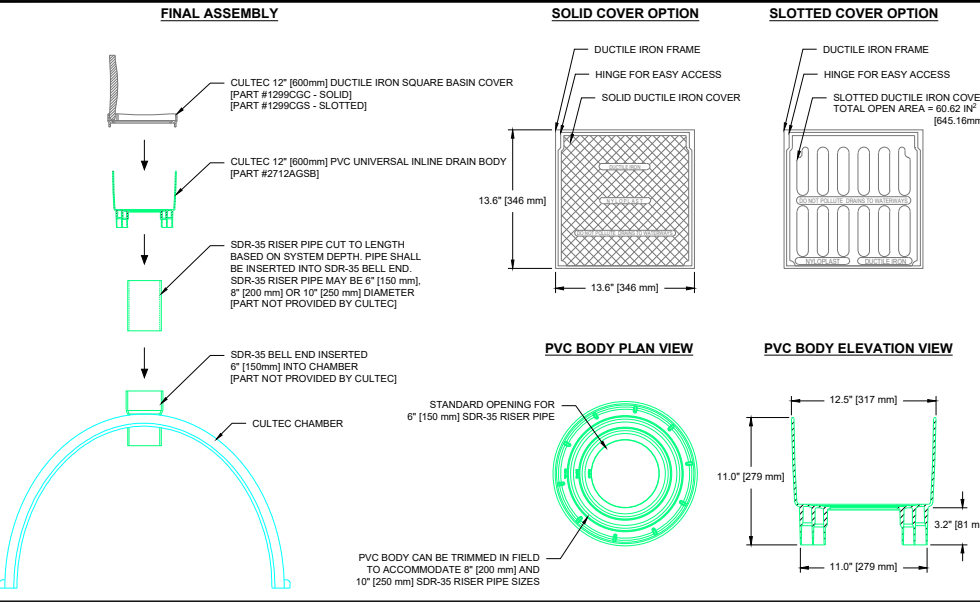


**CULTEC UNIVERSAL INSPECTION PORT KIT DETAIL**

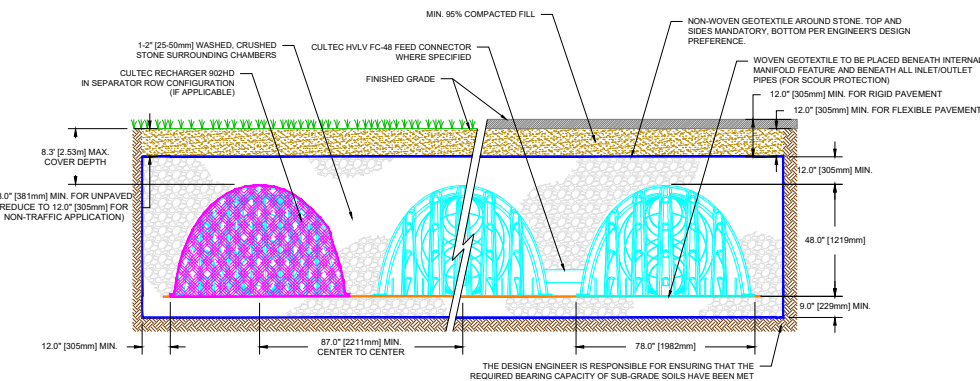


- NOTES:**
- THE CHAMBERS SHALL BE DESIGNED AND TESTED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". THE LOAD CONFIGURATION SHALL INCLUDE:
    - 1.a. INSTANTANEOUS AASHTO DESIGN TRUCK LIVE LOAD AT MINIMUM COVER
    - 1.b. MAXIMUM PERMANENT (50-YEAR) COVER LOAD
    - 1.c. 1-WEEK PARKED AASHTO DESIGN TRUCK LOAD
  - THE CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F3430-20 "STANDARD SPECIFICATION FOR CELLULAR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". THE CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F3430-20 "STANDARD SPECIFICATION FOR CELLULAR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" SPECIFICATIONS SECTION 12.12, WHEN INSTALLED ACCORDING TO CULTEC'S RECOMMENDED INSTALLATION INSTRUCTIONS. THE STRUCTURAL DESIGN OF THE CHAMBERS SHALL INCLUDE THE FOLLOWING:
    - 3.a. THE CREEP MODULUS SHALL BE 50-YEAR AS SPECIFIED IN ASTM F3430
    - 3.b. THE MINIMUM SAFETY FACTOR FOR LIVE LOADS SHALL BE 1.75
    - 3.c. THE MINIMUM SAFETY FACTOR FOR DEAD LOADS SHALL BE 1.95

**CULTEC RECHARGER 902HD CROSS SECTION**

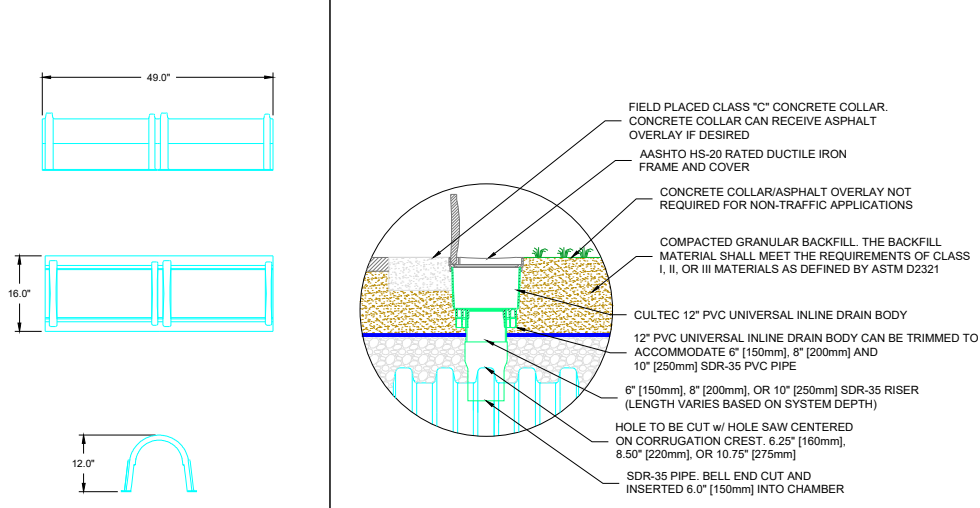


**CULTEC HVLV FC-48 FEED CONNECTOR THREE VIEW**


**OPTIONAL CULTEC INSPECTION PORT - ZOOM DETAIL**

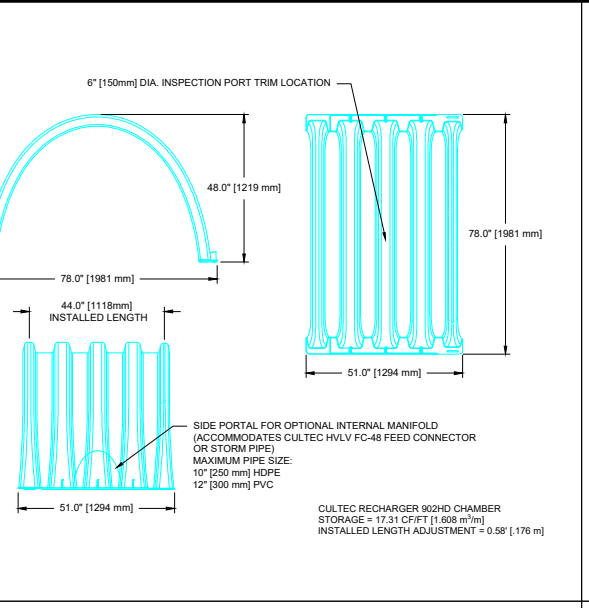


**CULTEC RECHARGER 902HD HEAVY DUTY THREE VIEW**

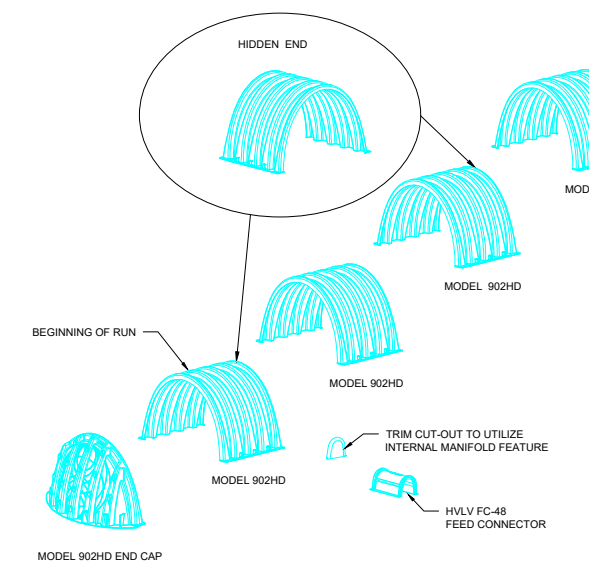

**CULTEC RECHARGER 902HD HEAVY DUTY TYPICAL INTERLOCK**

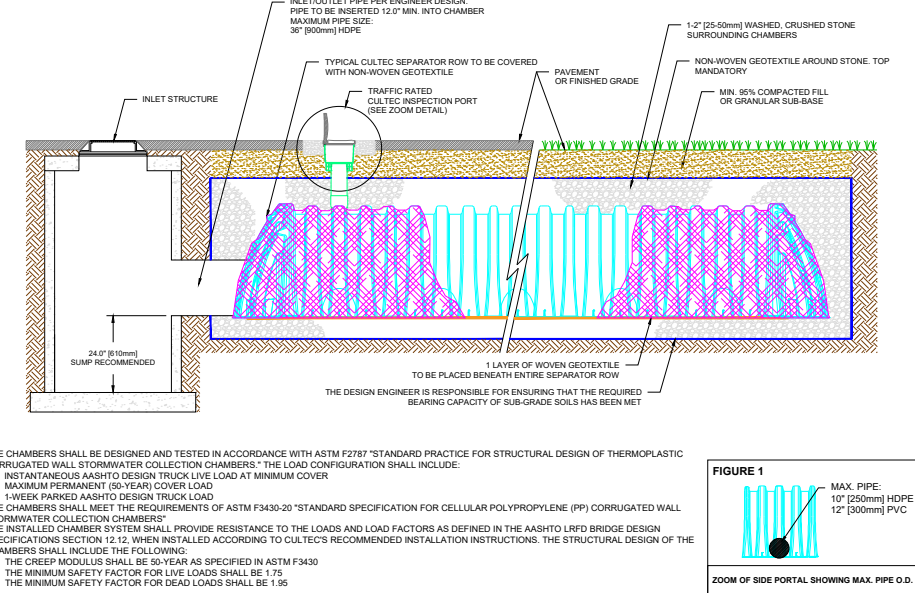

- NOTES:**
- THE CHAMBERS SHALL BE DESIGNED AND TESTED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". THE LOAD CONFIGURATION SHALL INCLUDE:
    - 1.a. INSTANTANEOUS AASHTO DESIGN TRUCK LIVE LOAD AT MINIMUM COVER
    - 1.b. MAXIMUM PERMANENT (50-YEAR) COVER LOAD
    - 1.c. 1-WEEK PARKED AASHTO DESIGN TRUCK LOAD
  - THE CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F3430-20 "STANDARD SPECIFICATION FOR CELLULAR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". THE CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F3430-20 "STANDARD SPECIFICATION FOR CELLULAR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" SPECIFICATIONS SECTION 12.12, WHEN INSTALLED ACCORDING TO CULTEC'S RECOMMENDED INSTALLATION INSTRUCTIONS. THE STRUCTURAL DESIGN OF THE CHAMBERS SHALL INCLUDE THE FOLLOWING:
    - 3.a. THE CREEP MODULUS SHALL BE 50-YEAR AS SPECIFIED IN ASTM F3430
    - 3.b. THE MINIMUM SAFETY FACTOR FOR LIVE LOADS SHALL BE 1.75
    - 3.c. THE MINIMUM SAFETY FACTOR FOR DEAD LOADS SHALL BE 1.95



**CULTEC SEPARATOR ROW - CULTEC INSPECTION PORT DETAIL (IF APPLICABLE)**

**CULTEC STORMWATER CHAMBER**

PROJECT NO: - DATE: 10/2023 CHECKED BY: DPG

DESIGNED BY: TECH SHEET NO: N.T.S. 1 OF 1

**RECHARGER 902HD**

DETAIL SHEET

**CULTEC**  
Subsurface Stormwater Management Systems

P.O. Box 280 PH: (203) 775-4416  
878 Federal Road PH: (800) 4-CULTEC  
Brookfield, CT 06804 CT-tech@cultec.com  
www.cultec.com

THE DRAWING HAS BEEN PREPARED TO SUPPORT THE PROJECT ENGINEER'S RECORD FOR THE PROPOSED SYSTEM. THE DRAWING HAS BEEN PREPARED BASED ON INFORMATION PROVIDED TO CULTEC UNDER THE PROTECTION OF THE PROJECT ENGINEER OF RECORD. CULTEC SYSTEMS DESIGN SHALL COMPLY WITH ALL APPLICABLE LAWS, REGULATIONS AND MANUFACTURER REQUIREMENTS.