



**Providing Stormwater and
Septic Solutions Since 1986**


CULTEC, Inc.
878 Federal Road
P.O. Box 280
Brookfield, CT 06804 USA

Phone: 203.775.4416
Fax: 203.775.1462
Email: custservice@cultec.com
Website: www.cultec.com

MODEL # NO. 66 WOVEN GEOTEXTILE, CULTEC NO. 66 WOVEN GEOTEXTILE

CULTEC No. 66 Woven Geotextile is designed to provide an economical solution to prevent scouring at inlets and beneath the CULTEC internal manifold feature. It may also utilized below the chambers of the CULTEC Separator Row as a barrier to prevent soil/ contaminate intrusion and allow maintenace

[+ more](#)

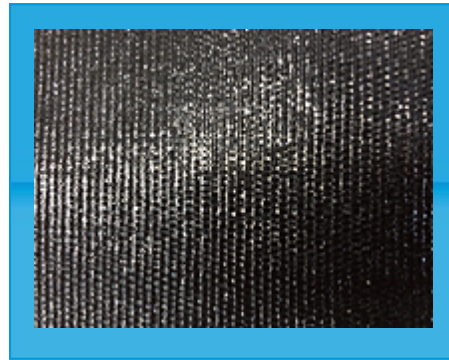

[Specifications](#) | [Technical References](#)

Specifications

Appearance	Black
Grab Tensile (ASTM-D-4632)	315 lbs. 1,401 N
Elongation (ASTM D-4632)	15 %
Mullen Burst (ASTM-D-3786)	600 psi 4138 kPa
Trapezoid Tear (ASTM-D-4533)	115 lbs. 511.5 N
Puncture (ASTM-D-4833)	150 lbs. 667.2 N
CBR Puncture	900 lbs. 4.00 kN

UV Resistance (ASTM-D-4355)	70%
Permittivity (ASTM-D-4491)	0.05 sec-1
Flow Rate (ASTM-D-4491)	4 gal/min/sf 160 l/min/sq.mt
Apparent Opening Size (ASTM-D-4751)	40 U.S. Sieve 0.425 mm

Technical References

Downloads

[PDF - CULTEC No. 66 Woven Geotextile Submittal](#)