CULTEC, Inc.

Landscaper Series™ for Residential Drainage



CULTEC's Landscaper Series™ chambers are used in residential applications to control rainwater collected from gutters and/or catch basins. The chambers collect and store the stormwater underground until the soil is able to accept it back into the ground. Puddles and saturated soil are eliminated as water is diverted into the chamber and recharged into the ground. CULTEC chambers are lightweight and easily transported by hand making them ideal to install in tight areas or where minimal site disturbance is desired.

CULTEC Plastic Chambers

- · Control rainwater from gutters and driveway
- Help eliminate ponding
- Manage water from pool backwash
- Act as dry wells

System Benefits

- Large storage capacity
- Lightweight
- · Can be carried by one or two people
- · Easily transported by pick-up truck
- Straight-forward installation
- Minimal site disturbance




The Landscaper Series $^{\text{TM}}$ is not to be used in traffic areas. The chambers are for use in non-traffic applications only.

To find out about products which are available for traffic applications, contact CULTEC at 203-775-4416.



CULTEC, Inc.

Landscaper Series™ as a Single Dry Well

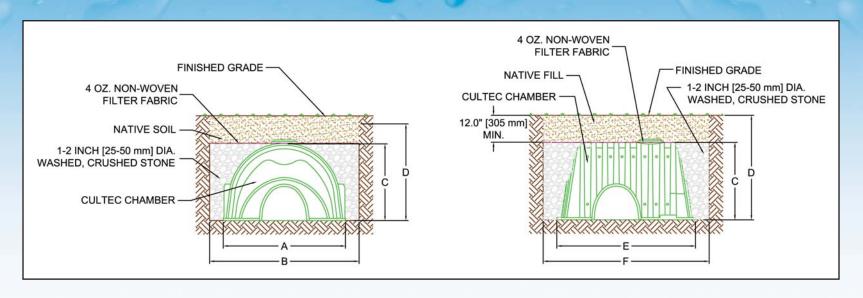

	Α	В	С	D	E	F					
Model	Chamber Width	Trench Width	Chamber Height	Trench Depth	Chamber Length	Trench Length	Bare Chamber Volume		Storage Volume per Installed Unit		Stone Required per Unit
HVLV™ 180BT LS	36"	48"	20.5"	32.5″	5.63'	6.63′	19.40 ft ³	145 gal.	29.76 ft ³	223 gal.	0.96 yd³
	914 mm	1219 mm	521 mm	826 mm	1.72 m	2.02 m	0.55 m^3	549 I	0.84 m³	843 I	0.73 m ³
Recharger® V8R LS	60"	72″	32"	44"	5.08′	6.08′	44.12 ft ³	330 gal.	65.40 ft ³	489 gal.	1.97 yd³
	1524 mm	1829 mm	813 mm	1118 mm	1.55 m	1.85 m	1.25 m³	1249 I	1.85 m³	1852 I	1.51 m³



Values will differ for multiple interlocked units. Contact CULTEC for assistance.

All calculations are for a single Model R unit installed as a non-traffic, residential application.

The Landscaper Series™ is not to be used in traffic areas. The chambers are for use in non-traffic applications only. To find out about products which are available for traffic applications, contact CULTEC at 203-775-4416.



CULTEC, Inc.

878 Federal Road • P.O. Box 280 • Brookfield, CT 06804

Phone: 203-775-4416 • Toll Free: 800-4-CULTEC • Fax: 203-775-1462 • Web: www.cultec.com

